


General Configuration

Es laufen alle LP an einem Switch zusammen.
Die LP1, LP4 haben eine Sim Karte verbaut.

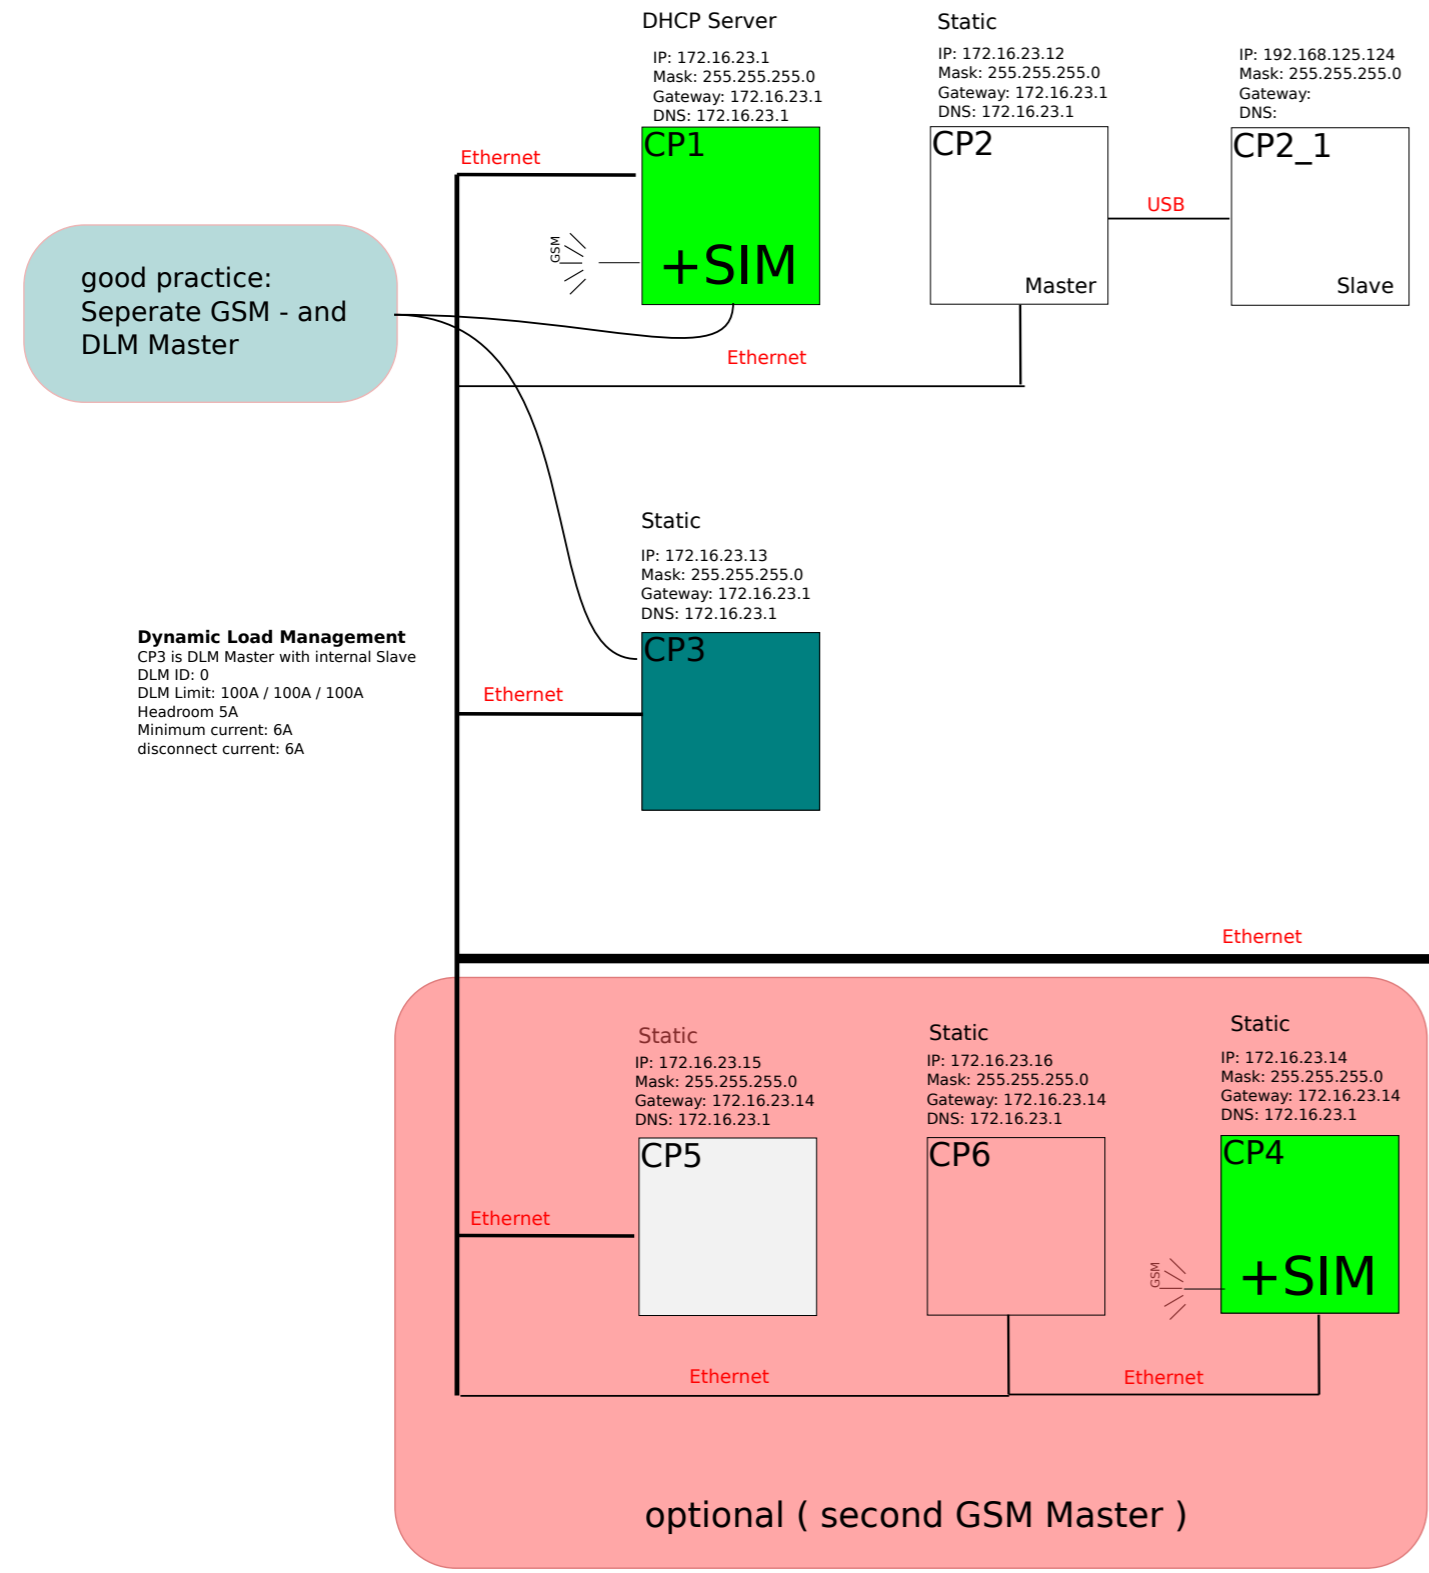

good practice: Seperate GSM - and DLM Master

Master Slave configuration for the 2 CPs on one pole with USB connection.
CP1 is configured as DHCP-server (with DNS relay).
CP1 acts as gateway for CP2, CP3.
CP4 acts as gateway for CP5, CP6.

CP1, CP4 have a Backendconnection via GSM and WAN Routing enabled.
The other CPs have Backend via Ethernet.

Access Point Name (APN): xxx
APN Username: xxx
APN Password: xxx
URL: xxx

good practice: Avoid IP issues and do not use IPs in the Range of: 172.16.23.100 - 172.16.23.255

Beispiel für Testaufbau mit externem Zähler